


WHAT IS CLAIMED IS:


1. A hindered amine compound represented by the general formula (I) or (II):

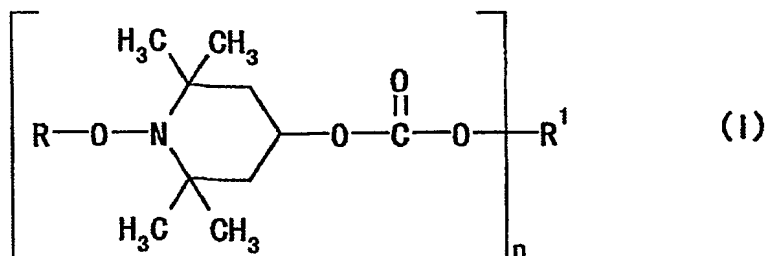

5

(in the formula, R is an alkyl group or a hydroxyalkyl group having 1-30 carbon atoms, or an alkenyl group having 2-30 carbon atoms, and n is an integer from 1-6. When n=1, R<sup>1</sup> is an alkyl group having 1-22 carbon atoms, an alkenyl group having 2-22 carbon atoms, or the group represented by the following general formula (III):


10

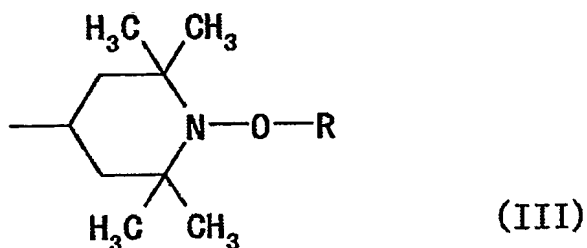

(R is the same alkyl group or hydroxyalkyl group having 1-30 carbon atoms, or alkenyl group having 2-30 carbon atoms as R above).

15


When n=2-6, R<sup>1</sup> is an organic group having 2-20 carbon atoms of valency n.

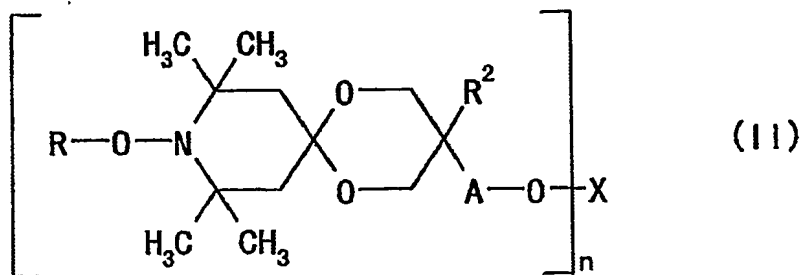

(in the formula, R is an alkyl group having 1-30 carbon atoms or an alkenyl group having 2-30 carbon atoms,  $\text{R}^2$  is a hydrogen atom, an alkyl group having 1-22 carbon atoms or an alkenyl group having 2-22 carbon atoms, and A is a single bond, linear- or branched-alkylene group having 1-12 carbon atoms, alkylene group with ether linkage; n is an integer from 2-6; X is  $-\text{C}(=\text{O})-$ , a linear- or branched-alkylene group having 4-40 carbon atoms with a terminal  $-\text{C}(=\text{O})\text{O}-$ , a linear- or branched-alkylene group having 4-40 carbon atoms with a carbonic acid ester linkage, or an organic group having 6-30 carbon atoms with 3-6 terminal  $-\text{O}-\text{C}(=\text{O})-$ ).

2. The hindered amine compound according to claim 1, wherein R in the general formula (I) is an alkyl group having 4-22 carbon atoms, n is 2, and  $\text{R}^1$  is an alkylene group having 2-12 carbon atoms.

3. The hindered amine compound according to claim 1, wherein n in the general formula (I) is 1, and R is a group having the following general formula (III):

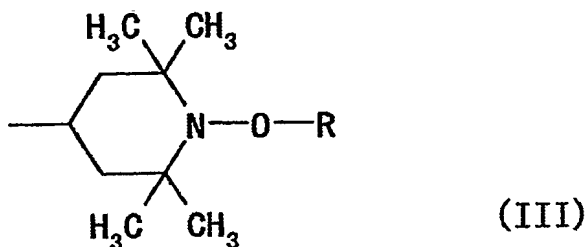

(R is an alkyl group having 10-22 carbon atoms).

4. A synthetic resin composition, wherein 0.01 to 10 weight parts of the hindered amine compound according to any of claims 1 to 3, is blended with 100 weight parts of a synthetic resin.

5. A polyolefin resin composition, wherein 0.05-5 weight parts of the hindered amine compound according to any of claims 1 to 3 is blended with 100 weight parts of a polyolefin resin.

6. An agricultural polyolefin film comprising the polyolefin resin composition according to claim 5.

7. A coating composition stabilized by the hindered amine compound according to any of claims 1-3.

8. A synthetic resin composition, wherein 1-30 weight parts of one or more of melamine phosphate, melamine pyrophosphate, melamine polyphosphate, piperazine phosphate, piperazine pyrophosphate and piperazine polyphosphate as a flame retarder, and 0.01 to 10 weight parts of the hindered amine compound according to any of claims 1 to 3, is blended with 100 weight parts of a synthetic resin composition.